
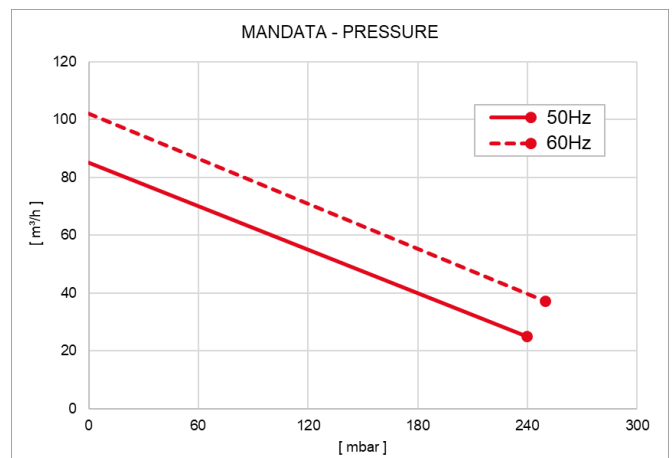


Modello - Model		TDL 80	
		50Hz	60Hz
Codice catalogo - Catalogue code		9413009	
Potenza motore - Motor power (3~) kW		0.7	0.83
IE3	Alimentazione - Power supply V±10% (Δ / Y)	230 / 400	265 / 460
	Efficienza - Efficiency %	80.7	77.0
Alimentazione - Power supply V±5% (Δ / Y)		200-240 / 345-415	220-275 / 380-480
Assorbimento - Absorption A (Δ / Y)		4.2-3.5 / 2.4-2.0	4.6-3.6 / 2.6-2.1
Portata - Flow rate m³/h		85	102
Vuoto - Vacuum mbar		-210	-250
Sovrappressione - Pressure mbar		+240	+250
Rumorosità - Noise level (UNI EN ISO 2151 - K 3dB) dB(A)		55	61
Peso - Weight kg [N]		15 [147]	

Subject to change without prior notice

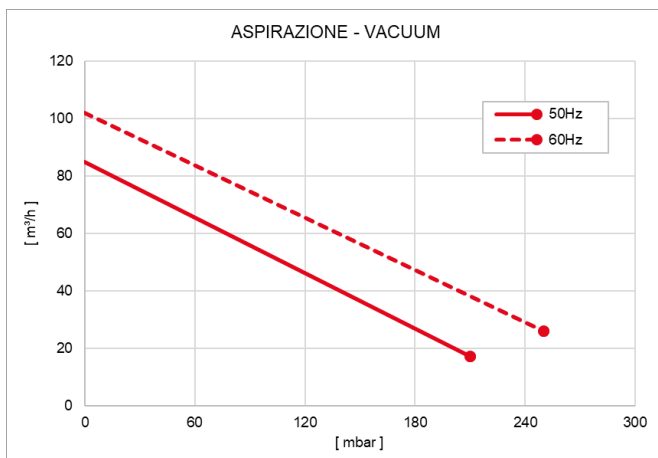

Curve riferite alla pressione di 1013mbar (Ass.) e temperatura 20°C (tolleranza ±10%)
 Curves refers to 1013mbar (Abs.) pression and 20°C temperature (tolerance ±10%)

È possibile montare lo scarico con curva a 90°, questo non ha alcun effetto sui valori tecnici.
 There may be 90° difference in the outlet but this has no effect on technical values.