
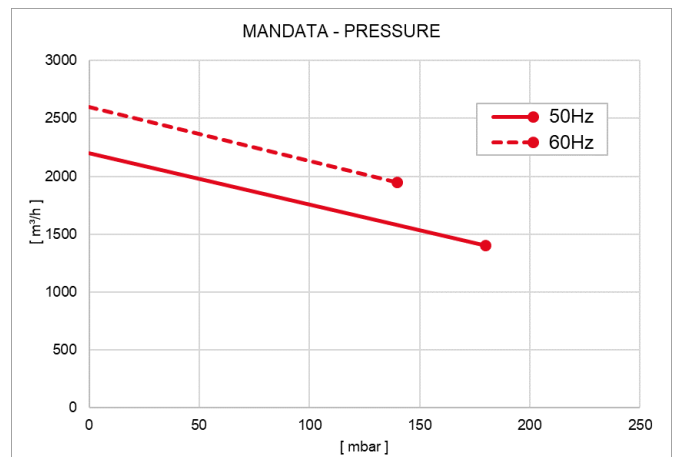


Modello - Model		TSL 2200	
		50Hz	60Hz
Codice catalogo - Catalogue code		9412042	
Potenza motore - Motor power (3~) kW		18.5	21.3
IE3	Alimentazione - Power supply V \pm 10% (Δ / Y)	400 / 690	460 / 795
	Efficienza - Efficiency %	92.4	91.7
Alimentazione - Power supply V \pm 5% (Δ / Y)		345-415 / 600-720	380-480 / 660-830
Assorbimento - Absorption A (Δ / Y)		40.8-33.9 / 23.1-19.3	47.2-37.4 / 25.0-21.7
Portata - Flow rate m ³ /h		2200	2650
Vuoto - Vacuum mbar		-200	-160
Sovrappressione - Pressure mbar		+180	+140
Rumorosità - Noise level (UNI EN ISO 2151 - K 3dB) dB(A)		75	84
Peso - Weight kg [N]		230 [2254]	

Subject to change without prior notice

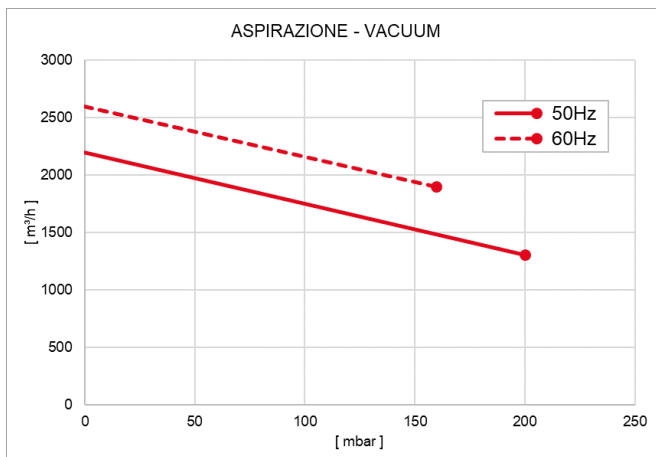

Curve riferite alla pressione di 1013mbar (Ass.) e temperatura 20°C (tolleranza \pm 10%)
 Curves refers to 1013mbar (Abs.) pression and 20°C temperature (tolerance \pm 10%)