

Ingersoll Rand

Reciprocating Single- and Two-stage Air Compressors
2-25 hp



Innovation

Reliability

Efficiency


Providing Customer-driven Compressor Solutions

When you've been delivering reliable reciprocating compressor results for more than 100 years, it's natural that your corporate culture supports a strong tradition of evolutionary enhancements. Every new generation of employees builds on the experience and insights of their mentors. Today's legendary Ingersoll Rand air compressors started with an original rock-solid design and have steadily improved with added control and performance upgrades over the years.

They are world-renowned for their impressive legacy of long-life performance, ease of service and evolutionary design enhancements.

Efficient. Reliable. Built to last.

Ingersoll Rand has sold millions of reciprocating compressors worldwide.



1990s

Fully packaged units with E-series starters and CSA package certification are introduced.



2002

Compact single-stage compressors introduced.



2006

Fully packaged model with aftercooler, automatic tank drain, and low-oil-level shutdown is top choice for round-the-clock applications.



1980s

First blue-colored units feature new enhancements.



2000

Premier Series packaging adds dual controls, deluxe starter, and liquid-filled pressure gauge.



2003

Pressure-lubricated model with industrial-grade two-stage air cleaner added.



It's All About Choices

Better choices lead to better solutions for saving money and improving overall return on investment in your unique application.

That's why Ingersoll Rand single- and two-stage reciprocating compressors offer you more choices of compressor sizes and compressor features to suit your needs. If you define unsurpassed performance by maximum operating pressure, increased air flow and extended duty cycles, count on an Ingersoll Rand reciprocating air compressor to deliver it reliably.

Take advantage of Ingersoll Rand expertise, product selection, service and system solutions to help you identify the optimum compressor size, performance features and package options for your applications. And learn how you can strengthen your business through:

- Lower operating costs
- Increased productivity
- Improved quality
- A better working environment

Two-stage Electric-powered Air Compressors			
Feature	Value Package (5, 7.5, 10 & 15hp)	Value Plus Package (10 & 15hp)	Premium Package (5, 7.5, 10, 15 & 20hp)
100% Cast Iron Pump	✓	✓	✓
ASME Coded Receiver Tank	✓	✓	✓
NEMA 1 & ODP Motor	✓	✓	✓
Magnetic Motor Starter	✓ (Except 2340 packages with single-phase voltage)	✓	✓ (Except 2340 packages with single-phase voltage)
Automatic Start/Stop Control with Pressure Switch	✓	✓	✓ (5 & 7.5hp only)
Oil Sight Glass	✓ (10 & 15hp only)	✓	
Manual Drain	✓		
Electric Drain		✓	✓
Air-Cooled Aftercooler		✓	✓
Low Oil Level Switch			✓
Dual Control with Centrifugal Unloader			✓ (10 & 15hp only)

Value Package (5, 7.5, 10 & 15hp) An economical choice in a dependable compressed air source, the Value Package offers the perfect solution for commercial, automotive and light industrial applications with intermittent load demands.

Value Plus Package (10 & 15hp) For applications that demand a heavier-duty cycle. Step up to this enhanced version of our base package. It is ideal for light industry applications. The Value Plus Package comes factory-fitted with options shown above for unmatched reliability in most diversified applications.

Premium Package (5, 7.5, 10, 15 & 20hp) For applications that are the most demanding or require greater control over compressed air supply. Step up to our top-of-the-line Premium Package. These air compressors come standard with factory-fitted options shown above for unmatched reliability in 100% continuous-duty applications.

Why Ingersoll Rand Pumps Are Better... Excellence in Design!

Single-stage Air Compressor

Configured in space-saving stationary and portable models, these durable compressors are a favorite with DIY homeowners and in the construction industry.

Key features include:


- Industry-leading 5,000-8,000 hour design life
- Industrial-quality cast iron construction
- Reliable high-speed valve design
- Fully-balanced crankshaft that reduces vibration
- 135 psi max. discharge pressure
- Honda engine-driven wheel barrow compressor




Two-stage Gas-powered Air Compressors

Ingersoll Rand's two-stage gasoline engine driven air compressors are designed to provide compressed air where electric power is not readily available. They're used in fleet and field service applications, remote pneumatic applications and emergency production lines.

- Available with easy-starting Honda, or Kohler engines
- Fuel-efficient idle control
- Advanced safety features including low oil level shutdown for gas engines

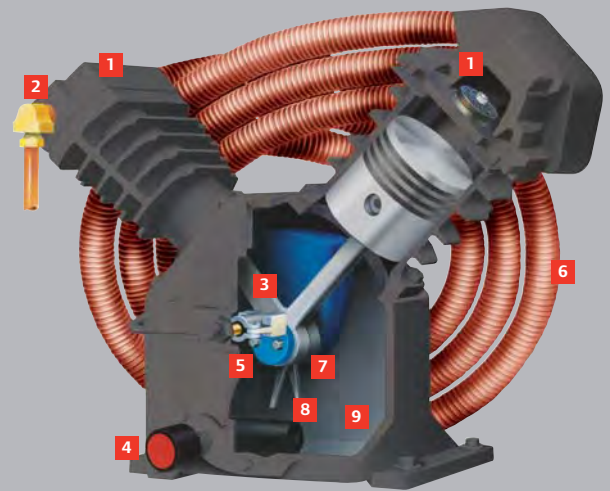

- 1 Two-stage Design:** Delivers pressures up to 175 psig
- 2 Radial Fins for Maximum Cooling:** Even 360° cooling of barrel cylinders eliminates hot spots
- 3 One-piece Connecting Rod:** Fewer wearing parts
- 4 Low Oil Level Switch:** Provides constant protection
- 5 Centrifugal Unloader:** Ensures loadless starts, for maximum starter protection
- 6 Integral Fan Blade/Finned Copper Intercooler:** Runs cooler, even in the most demanding conditions
- 7 Overhung Crankshaft:** Precision balanced to run smoothly and quietly; simplifies maintenance and wear-sleeve replacement
- 8 Splash Lubrication:** Simple and reliable.
- 9 100% Cast Iron:** Designed for a lifetime

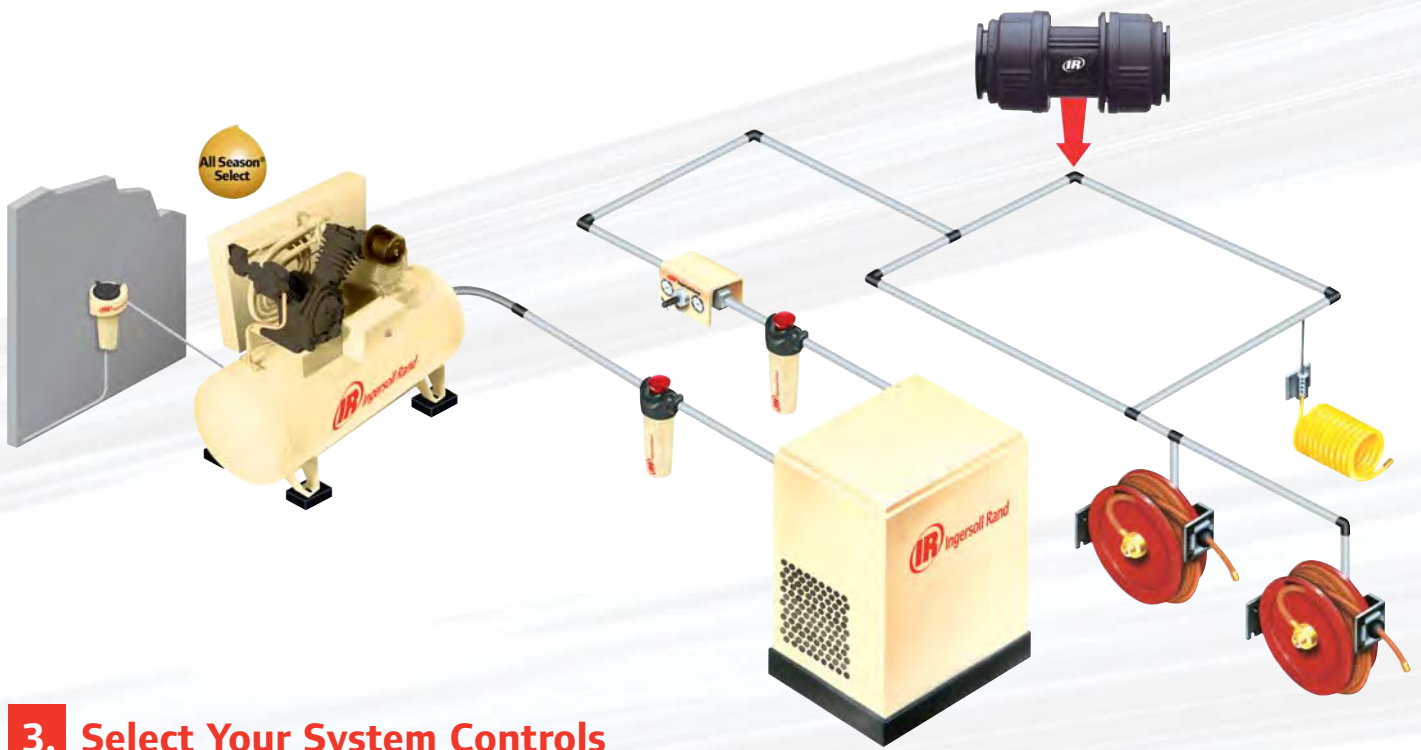

3. Select Your System Controls and Accessories

Ingersoll Rand accessories are available for all power sources.

IntelliFlow Pneumatic Flow Controller



- Energy savings
- Control pressure ± 1 psig (.07 bar g)
- Single point control system
- Reduce leak losses
- Increase system productivity
- Protect all downstream equipment

EZ-line SimplAir Compressed Air Piping

- High-quality anodized aluminum pipe
- Non-corrosive piping
- Reduced pressure loss
- Higher flow rates than other piping
- Easy and fast installation



EDV Electronic Drain Valve

- Automatically removes moisture from tanks, compressors, filters, drip legs



Filters, Regulators and Lubricators (FRLs)

FRLs provide point-of-use air conditioning to enhance tool longevity and process quality. Filters remove rust, scale and condensation that increase wear on tools regulators and provide constant pressure with varying upstream pressure. Lubricators provide lubricating oil to tools, cylinders, valves and other equipment.



Oil Water Separators

- Removes oil from drain condensate
- Allows for clean water discharge



Global Reach, Local Touch

No matter what the industry or location, Ingersoll Rand is committed to serving you 24 hours a day, seven days a week. Our worldwide network of distributors, engineers and certified, factory-trained technicians, are a phone call away — ready to support you with innovative and cost-effective service solutions that will keep you running at peak performance.



Start-up Kits

Ingersoll Rand offers All Season Select[®] start-up kits to provide improved protection. Each kit contains all the parts needed to correctly start up and maintain your compressor for the first year. The start-up kits provide everything you need for 2,000 hours of service between changes under normal operating conditions, along with the added protection of a two-year extended warranty.

All start-up kits include:

- All Season Select[®] lubricant, our synthetic, all-temperature blend designed to increase efficiency, reduce wear and prevent carbon build-up
- Replacement air filter elements

Specifications

Two-stage Electric-powered – Value Package									
Model	hp	Tank Size/ Configuration	Stationary or Portable	Capacity (cfm) @ 175 psig	Max Pressure (psig)	Dimensions (L x W x H in)	Net Weight (lbs)	Tank Outlet (in)	Startup Kit
2340L5-V	5.0	60-Gal. Vertical	S	14.0	175	48 x 40 x 76	435	0.50	32305880
2340N5-V	5.0	80-Gal. Vertical	S	14.0	175	48 x 40 x 76	505	0.50	32305880
2475N5-V	5.0	80-Gal. Vertical	S	16.8	175	48 x 40 x 76	505	0.75	32305880
2475N7.5-V	7.5	80-Gal. Vertical	S	24.0	175	48 x 40 x 76	611	0.75	32305880
2545E10-V	10.0	120-Gal. Horizontal	S	35.0	175	83 x 36 x 65	920	0.75	32305898
2545K10-V	10.0	120-Gal. Vertical	S	35.0	175	51 x 46 x 83	1,104	1.00	32305898
7100E15-V	15.0	120-Gal. Horizontal	S	50.0	175	83 x 36 x 65	1,239	0.75	32305898

Available voltages: 230/1/60 (5-7.5 hp only), 200/3/60, 230/3/60, 460/3/60 and 575/3/60 voltages

Packages include magnetic starter (except 2340 models with single-phase voltage), manual drain, automatic start/stop control with pressure switch

Two-stage Electric-powered – Value Plus Package									
Model	hp	Tank Size/ Configuration	Stationary or Portable	Capacity (cfm) @ 175 psig	Max Pressure (psig)	Dimensions (L x W x H in)	Net Weight (lbs)	Tank Outlet (in)	Startup Kit
2545E10-VP	10.0	120-Gal. Horizontal	S	35.0	175	83 x 36 x 65	1,104	0.75	32305898
2545K10-VP	10.0	120-Gal. Vertical	S	35.0	175	51 x 46 x 83	1,104	1.00	32305898
7100E15-VP	15.0	120-Gal. Horizontal	S	50.0	175	83 x 36 x 65	1,297	0.75	32305898

Available voltages: 200/3/60, 230/3/60, 460/3/60 and 575/3/60 voltages

Packages include magnetic starter, electric drain, Automatic start/stop control with pressure switch, air-cooled aftercooler

Two-stage Electric-powered – Premium Package									
Model	hp	Tank Size/ Configuration	Stationary or Portable	Capacity (cfm) @ 175 psig	Max Pressure (psig)	Dimensions (L x W x H in)	Net Weight (lbs)	Tank Outlet (in)	Startup Kit
2475N5-P	5.0	80-Gal. Vertical	S	16.8	175	48 x 40 x 76	597	0.75	32305880
2475N7.5-P	7.5	80-Gal. Vertical	S	24.0	175	48 x 40 x 76	611	0.75	32305880
2545E10-P	10.0	120-Gal. Horizontal	S	35.0	175	83 x 36 x 65	1,104	0.75	32305898
2545K10-P	10.0	120-Gal. Vertical	S	35.0	175	51 x 46 x 83	1,104	1.00	32305898
7100E15-P	15.0	120-Gal. Horizontal	S	50.0	175	83 x 36 x 65	1,297	0.75	32305898

Available voltages: 230/1/60 (5-7.5 hp only), 200/3/60, 230/3/60, 460/3/60 and 575/3/60 voltages

Packages include magnetic starter, electric drain, automatic start/stop control with pressure switch (5 hp & 7.5hp), dual control with centrifugal unloader (10hp & 15hp), air-cooled aftercooler, low oil level switch

Single-stage Electric-powered									
Model	hp	Tank Size/ Configuration	Stationary or Portable	Capacity (cfm) @ 90 psig	Max Pressure (psig)	Dimensions (L x W x H in)	Net Weight (lbs)	Tank Outlet (in)	Startup Kit
P11U-A9	2.0	4-Gal. Twin	P	4.30	135	19 x 19 x 19	77	0.25	-
P1.5IU-A9	2.0	20-Gal. Vertical	P	5.20	135	22 x 23 x 43	200	0.25	-
SS3J2-WB	2.0	8-Gal. Twin	P	5.70	135	43 x 18 x 25	175	0.25	97338099
SS3J3-WB	3.0	8-Gal. Twin	P	11.3	135	43 x 18 x 25	175	0.25	97338099
SS3L3	3.0	60-Gal. Vertical	S	11.3	135	20 x 23 x 66	300	0.50	97338099
SS5L5	5.0	60-Gal. Vertical	S	18.1	135	20 x 30 x 71	310	0.50	20100251

Available voltages: 120/1/60 (P11U-A9), 115/1/60 (P1.5IU-A9), and 230/1/60 (SS3, SS5) voltages

Two-stage Gas-powered										
Model	hp	Engine	Tank Size/ Configuration	Stationary or Portable	Capacity (cfm) @ 175 psig	Max Pressure (psig)	Dimensions (L x W x H in)	Net Weight (lbs)	Tank Outlet (in)	Startup Kit
2475F13GH	13	Honda	30-Gal. Horizontal	P	25.0	175	51 x 33 x 44	469	0.50	32312936
2475X13GH	13	Honda	Baseplate Mounted	P	25.0	175	33 x 36 x 36	440	0.50	32312936
2475F12.5G	13	Kohler	30-Gal. Horizontal	P	24.0	175	51 x 33 x 44	469	0.50	32305872
2475X12.5G	13	Kohler	Baseplate Mounted	P	24.0	175	33 x 36 x 36	440	0.50	32305872

Single-stage Gas-powered										
Model	hp	Engine	Tank Size/ Configuration	Stationary or Portable	Capacity (cfm) @ 90 psig	Max Pressure (psig)	Dimensions (L x W x H in)	Net Weight (lbs)	Tank Outlet (in)	Startup Kit
SS3J5.5GH-WB	5.5	Honda	8-Gal. Twin	P	11.8	135	43 x 18 x 26	175	0.25	97339501



Ingersoll Rand Industrial Technologies provides products, services and solutions that enhance our customers' energy efficiency, productivity and operations. Our diverse and innovative products range from complete compressed air systems, tools and pumps to material and fluid handling systems and environmentally friendly microturbines. We also enhance productivity through solutions created by Club Car®, the global leader in golf and utility vehicles for businesses and individuals.

www.ingersollrandproducts.com

Distributed by:



Ingersoll Rand compressors are not designed, intended or approved for breathing air applications. Ingersoll Rand does not approve specialized equipment for breathing air applications and assumes no responsibility or liability for compressors used for breathing air service.

Nothing contained on these pages is intended to extend any warranty or representation, expressed or implied, regarding the product described herein. Any such warranties or other terms and conditions of sale of products shall be in accordance with Ingersoll Rand's standard terms and conditions of sale for such products, which are available upon request.

Product improvement is a continuing goal at Ingersoll Rand. Designs and specifications are subject to change without notice or obligation.

